

1 ATTACH HOSE ADAPTOR TO THE SINK



Unscrew the aerator tip off your sink and screw on the Sink-to-Hose Adapter (double threaded silver piece), which is found inside the WaterTank Work Box. Use pliers to tighten



Fill WaterTank by attaching the Brass Swivel Fitting of the On/Off Flow Control Valve to the Sink. Turn Blue Handle Valve to the OPEN Position & turn water on. (Cold to Tepid Water, NEVER HOT.)


UPON ARRIVAL OF YOUR WATERING MACHINE, PLEASE CAREFULLY HANDLE AND UNPACK.



HOW THE WATER TANK WORKS

Normal water pressure will charge the WaterTank's unique tank! The rubber double diaphragm separates water from the inside tank walls and air charge, so no contamination enters the water used on plants or produce. The WaterTank quickly connects and disconnects from any water source and automatically shuts off when the tank is full.

2 FILL TIME IS 5 MINUTES - WATERTANK IS FULL

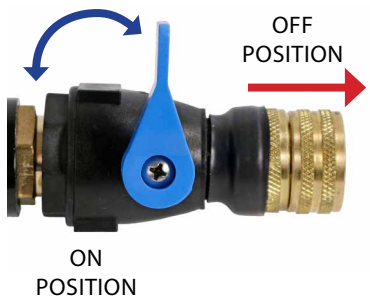

CAUTION: DO NOT Unscrew the Brass Double Female Swivel off of the Shut-Off Valve or it will leak and warranty WILL BE VOID!

This is a 1/4 turn valve. DO NOT force past the OFF Position or Valve Handle may snap off!

1.) Shut off water source 2.) Turn the blue handle valve to the OFF Position 3.) Unscrew from sink

3 ATTACH THE WATERING WAND



UNCONNECTED

Screw the Swivel end of the Flow Control Valve to the Watering Wand. Keep the Valve in OFF position



CONNECTED

4 ADJUST THE FLOW



With the Watering Wand in the OPEN Position (A), Slightly crack open the Shut-Off Valve Control Valve (B) to adjust the flow as desired. NOTE: When the WaterTank is full, it is under high pressure. USE CAUTION!



ONE-TOUCH WATERING WAND



Extremely easy to use, the One-Touch can be adjusted from OFF to FULL FLOW and anywhere in between with thump-tip precision




The exclusive Extendo-Flex No-Drip-Tip



IMPORTANT INFORMATION

- ONLY fill with cold to tepid water
- DO NOT FILL WITH HOT WATER
- Hot water MAY damage the inside rubber bladder and WILL VOID the warranty
- Store properly. Keep away from temperatures exceeding 100°F.

IMPORTANT: If air is removed, the tank will be water logged. If this happens, recharge instructions can be provided directly to you. Call 1-800-999-9399 or email customerservice@carlson-airflo.com

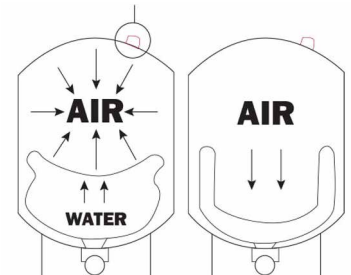

CAUTION: DO NOT Break or Remove Cap and release air from top chamber. This WILL disable the unit!