

Instructions to Recharge Portable Watering Machine


Tools Needed
3/16"
Allen Key



Open Shut-Off Valve at the end of the Hose so water can escape.



Remove Work Box Mat to expose button head bolts.

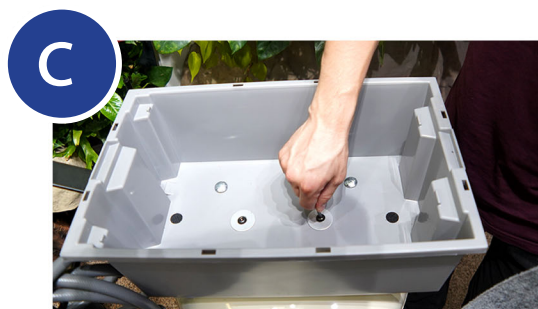


Using the 3/16" Allen Key, unscrew the button head bolts to remove the Work Box.



Remove the Air Stem Cap.



Using an Air Compressor, begin adding air to the Tank.

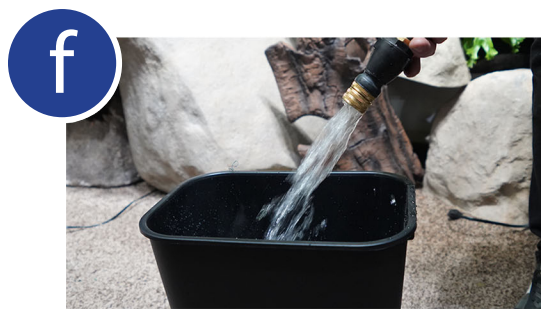

As air is going into the tank, water will begin to empty out of the Hose.



When the tank is completely empty of water, set the Air Pressure to 15 psi.



Screw the Air Stem Cap back on the Air Stem and screw on the Work Box to the top of the Tank.